



DOM 100

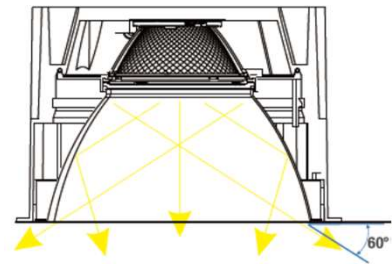

Recessed Downlight

Compact size with cutout of 100mm.  
Integrated mechanicals of heatsink and mounting ring to reduce components.  
Deep recessed design achieves super eye comfort.  
Optimal lens technologies with medium and flood beam angles.  
Interchangeable reflectors of matt, white and black colors



|                    |       |
|--------------------|-------|
| Diameter           | 110mm |
| Height             | 79mm  |
| Cutout             | 100mm |
| Ingress Protection | IP54  |

|            |              |
|------------|--------------|
| Mounting   | (R) Recessed |
| Adjustable | No           |

|                |        |
|----------------|--------|
| System Power   | 15W    |
| Realised lumen | 1600lm |
| Power supply   | Remote |
| Voltage        | 36V    |

|             |                       |
|-------------|-----------------------|
| Beam Angle  | 30° / 50°             |
| CRI         | 90+                   |
| UGR         | <19                   |
| Step McAdam | <3                    |
| Lifetime    | 50,000 hours L80, B10 |

|                    |       |
|--------------------|-------|
| Colour Temperature | 2700K |
|                    | 3000K |
|                    | 4000K |

|        |       |
|--------|-------|
| Finish | Black |
|        | White |

|         |             |
|---------|-------------|
| Dimming | (N) On/Off  |
|         | (D) DALI    |
|         | (C) CASAMBI |

|           |           |
|-----------|-----------|
| Material  | Aluminium |
| Reflector | Aluminium |
| Warranty  | 5 Years   |

