
MINIMAL THIN TW



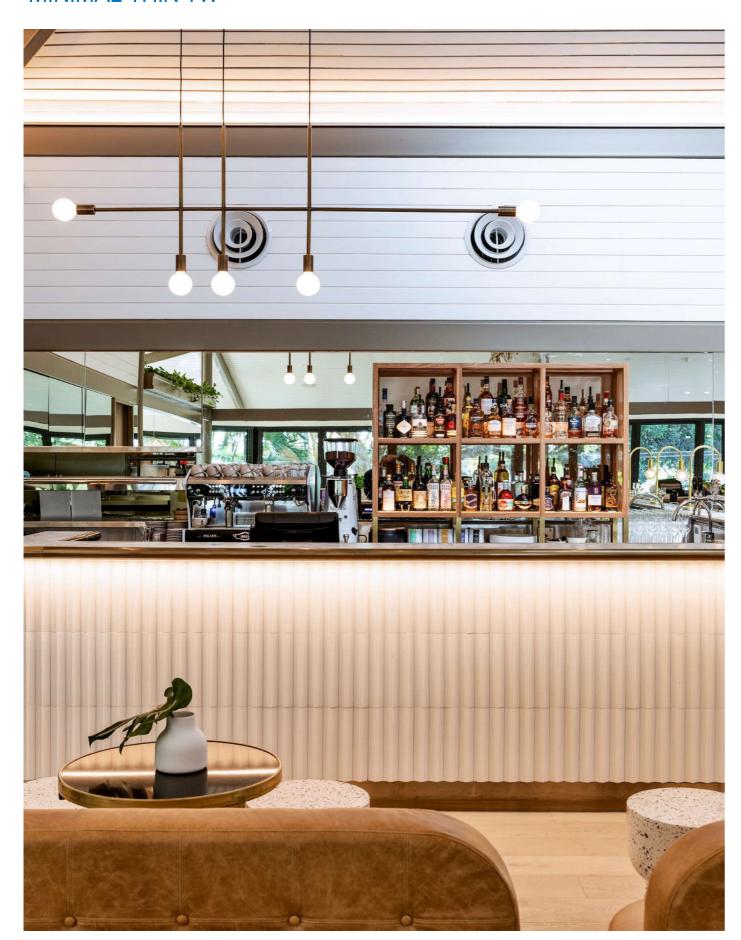


Linear LED Profile Manufactured in Australia

Minimal Thin is an original linear concept designed and manufactured in Australia that can be utilised for a multiplicity of lighting tasks for indoor linear LED applications.

Constructed from high grade and high impact polycarbonate and aluminium materials, Minimal Thin can be surface mounted or recessed into interior cabinetry and joinery, or used in other beautique architectural applications.

Available in multiple colour temperatures and new tech tuneable white adjustable colour temperature.

Minimal Thin can be made to individual module lengths or fabricated to custom lengths with continuos lighting effect. IP65 version available on request







Width	16mm
Height	13mm
Length	Custom
IP Rating	IP20
Mounting	(S) Surface Mount
	(P) Suspended
Output per meter	5W - 408 lm
	10W - 820 lm
	18W - 1470lm
Power supply	Remote
Voltage	24V
Beam Angle	120 Degree
CRI	90+
UGR	n/a
Step McAdam	<3
Lifetime	50,000 hours L80, B10
Colour Temperature	2700K ~ 6000K
Finish	Black
	White
	Anodised Silver
Dimming	(N) On/Off

Finish	Black
	White
	Anodised Silver
Dimming	(N) On/Off
	(D) DALI
	(C) CASAMBI
Material	Aluminium
Diffuser	Opal
Warranty	5 Years