



NITTO 65 RECESSED

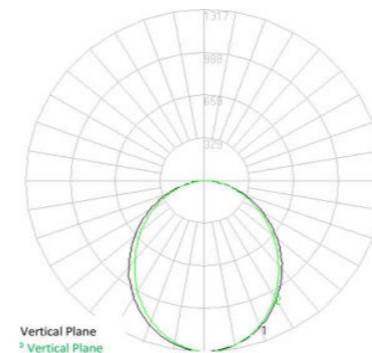

Linear LED Profile Manufactured in Australia

Nitto 65 is an original linear profile designed and manufactured in Australia that can be utilised for indoor continuous linear lighting applications. Constructed from high grade polycarbonate and aluminium materials Nitto 65 can be ceiling surface mounted or cable / rod suspended. Nitto 65 can be made to individual module lengths or fabricated to custom lengths. Available in multiple colour temperatures and new tech tuneable white adjustable colour temperature. Nitto 65 produces continuous light effects both for Direct and Indirect lighting distributions. IP54 version available on request

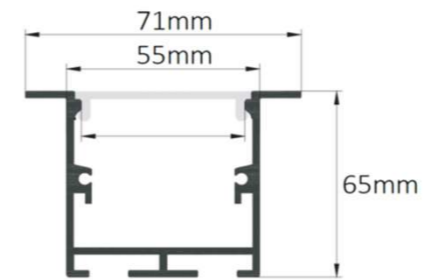

IP20 CE

Width	71mm
Height	65mm
Length	Custom
Ingress Protection	IP20
Mounting	(R) Recessed 55mm cutout
Output per meter	21W - 2654lm 27W - 3398lm 36W - 4489lm
Power supply	Integrated
Voltage	240V
Beam Angle	120 Degree
CRI	90+
UGR	<16
Step McAdam	<3
Lifetime	50,000 hours L80, B10
Colour Temperature	2700K 3000K 4000K Tunable White
Finish	Black White Anodised Silver
Dimming	(N) On/Off (D) DALI (C) CASAMBI
Material	Aluminium
Diffuser	Opal
Warranty	5 Years