



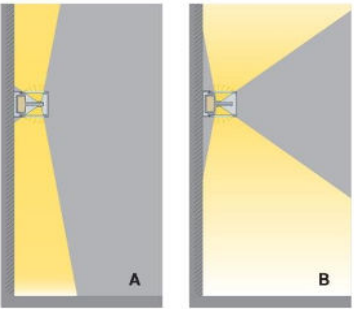


Exterior Wall Light

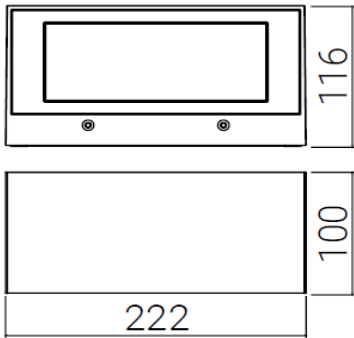

The asymmetric reflector can be individually fixed in two different positions:
(A) towards the wall to highlight the wall-washer effect or (B) adjusted outwards to illuminate balconies, walkways, corridors, etc.

1308 - Up/Down

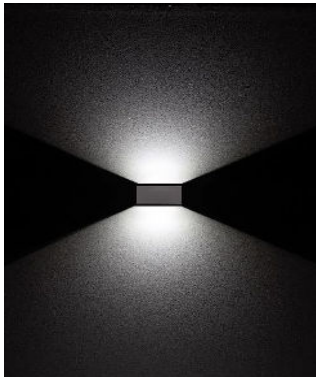

1309 - Down only



CRI 80

IP 65

IK 08

CE

Code	1308
Length	222mm
Width	116mm
Height	100mm
Ingress Protection	IP65
Impact Protection	IK08
Mounting	Wall
Adjustable	No
System Power	2 x 11W
Realised lumen	2 x 1150 lm
Power supply	Integrated
Voltage	240V
Beam Angle	Asymmetric
CRI	80

Colour Temperature	2700K
	3000K
	4000K

Finish	AN - Anthracite
	AG - Aluminium Grey
	BI - white

Dimming	No
---------	----

Material	Die-cast Aluminium
Diffuser	Clear Glass
Warranty	5 Years